



plotten

→ matplotlib documentation ist super hilfreich: <https://matplotlib.org>


→ Verschied. Plots: https://matplotlib.org/stable/plot_types/index.html

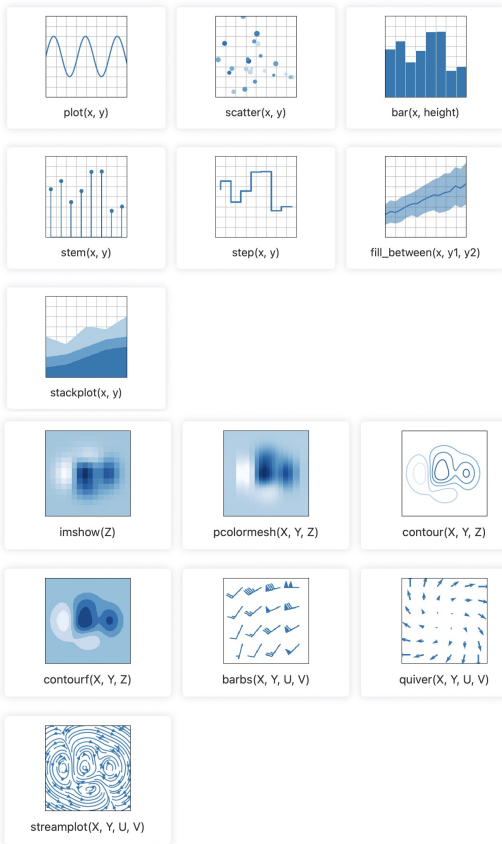

→ basic plots



→ functions to plot arrays/fields

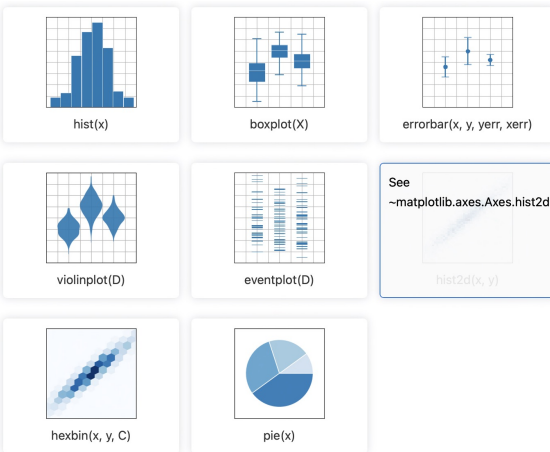

→ statistics plots

⇒ schaut immer welche Argumente eine Fkt nehmen kann, ob es horizontale Versionen gibt (bar vs. barh) etc.

e.g. https://matplotlib.org/stable/api/_as_gen/matplotlib.pyplot.bar.html

→ (fast) immer eine gute Liste mit allen Args etc.

Farben: https://matplotlib.org/stable/gallery/color/named_colors.html

(pandas) dataframe

	jan	feb	mar	apr	mai	jun	Spaltennamen
0							
1							
2							Zeile (row)
3							
4							
5							
6							

Indexnamen Spalte (column)

→ schönes cheat sheet:

https://pandas.pydata.org/Pandas_Cheat_Sheet.pdf

(auf den letzten zwei Seiten)

→ mit mehr Erklärungen:

<https://www.datacamp.com/cheat-sheet/pandas-cheat-sheet-for-data-science-in-python>

→ häufig benutzt / gut zu wissen

↳ `.iloc()`

↳ `.drop()`

↳ `.unique()` oder `nunique()`

↳ `.groupby()`

(→ <https://stackoverflow.com/questions/56310788/different-outcome-using-pandas-nunique-and-unique>)

→ viele dieser Konzepte/Fkt sind auch für data analysis und machine learning wichtig

Data Wrangling

with pandas Cheat Sheet
<http://pandas.pydata.org>

Pandas [API Reference](#) Pandas [User Guide](#)

Creating DataFrames

	a	b	c
1	4	7	10
2	5	8	11
3	6	9	12

```
df = pd.DataFrame(
    {"a": [4, 5, 6],
     "b": [7, 8, 9],
     "c": [10, 11, 12]},
    index = [1, 2, 3])
```

Specify values for each column.

```
df = pd.DataFrame(
    [[4, 7, 10],
     [5, 8, 11],
     [6, 9, 12]],
    index=[1, 2, 3],
    columns=['a', 'b', 'c'])
```

Specify values for each row.

		a	b	c
N	v			
D	1	4	7	10
	2	5	8	11
e	2	6	9	12

```
df = pd.DataFrame(
    {"a": [4, 5, 6],
     "b": [7, 8, 9],
     "c": [10, 11, 12]},
    index = pd.MultiIndex.from_tuples(
        [('d', 1), ('d', 2),
         ('e', 2)], names=['n', 'v']))
```


Create DataFrame with a MultiIndex

Method Chaining


Most pandas methods return a DataFrame so that another pandas method can be applied to the result. This improves readability of code.

```
df = (pd.melt(df)
      .rename(columns={
          'variable': 'var',
          'value': 'val'})
      .query('val >= 200'))
```

Tidy Data – A foundation for wrangling in pandas

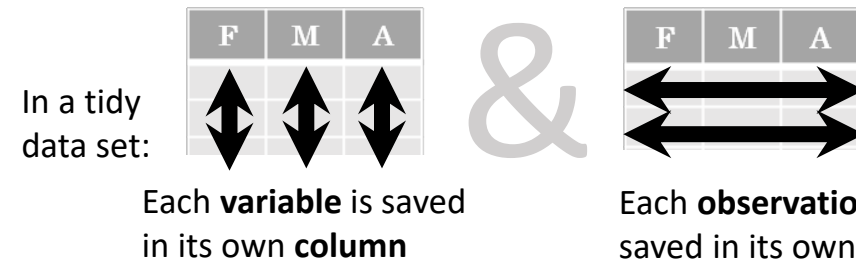

Tidy data complements pandas's **vectorized operations**. pandas will automatically preserve observations as you manipulate variables. No other format works as intuitively with pandas.

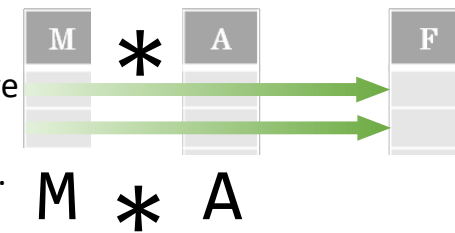

Reshaping Data – Change layout, sorting, reindexing, renaming




`pd.melt(df)`
Gather columns into rows.



`df.pivot(columns='var', values='val')`
Spread rows into columns.



`pd.concat([df1, df2])`
Append rows of DataFrames

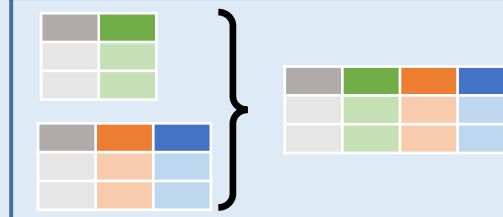

`pd.concat([df1, df2], axis=1)`
Append columns of DataFrames

`df.sort_values('mpg')`
Order rows by values of a column (low to high).

`df.sort_values('mpg', ascending=False)`
Order rows by values of a column (high to low).


`df.rename(columns = {'y': 'year'})`
Rename the columns of a DataFrame

`df.sort_index()`
Sort the index of a DataFrame

`df.reset_index()`
Reset index of DataFrame to row numbers, moving index to columns.

`df.drop(columns=['Length', 'Height'])`
Drop columns from DataFrame

Subset Observations - rows



`df[df.Length > 7]`
Extract rows that meet logical criteria.

`df.drop_duplicates()`
Remove duplicate rows (only considers columns).

`df.sample(frac=0.5)`
Randomly select fraction of rows.

`df.sample(n=10)` Randomly select n rows.

`df.nlargest(n, 'value')`
Select and order top n entries.

`df.nsmallest(n, 'value')`
Select and order bottom n entries.

`df.head(n)`
Select first n rows.

`df.tail(n)`
Select last n rows.

Subset Variables - columns



`df[['width', 'length', 'species']]`
Select multiple columns with specific names.

`df['width']` or `df.width`
Select single column with specific name.

`df.filter(regex='regex')`
Select columns whose name matches regular expression *regex*.

Using query

`query()` allows Boolean expressions for filtering rows.

`df.query('Length > 7')`

`df.query('Length > 7 and Width < 8')`

`df.query('Name.str.startswith("abc")', engine="python")`

Subsets - rows and columns

Use `df.loc[]` and `df.iloc[]` to select only rows, only columns or both.

Use `df.at[]` and `df.iat[]` to access a single value by row and column. First index selects rows, second index columns.

`df.iloc[10:20]`
Select rows 10-20.

`df.iloc[:, [1, 2, 5]]`
Select columns in positions 1, 2 and 5 (first column is 0).

`df.loc[:, 'x2': 'x4']`
Select all columns between x2 and x4 (inclusive).

`df.loc[df['a'] > 10, ['a', 'c']]`
Select rows meeting logical condition, and only the specific columns.

`df.iat[1, 2]` Access single value by index

`df.at[4, 'A']` Access single value by label

Logic in Python (and pandas)

	Logic in Python (and pandas)	
<	Less than	<code>!=</code> Not equal to
>	Greater than	<code>df.column.isin(values)</code> Group membership
==	Equals	<code>pd.isnull(obj)</code> Is NaN
<=	Less than or equals	<code>pd.notnull(obj)</code> Is not NaN
>=	Greater than or equals	<code>&, , ~, ^, df.any(), df.all()</code> Logical and, or, not, xor, any, all

regex (Regular Expressions) Examples

Regex	Example
<code>'\.'</code>	Matches strings containing a period '.'
<code>'Length\$'</code>	Matches strings ending with word 'Length'
<code>'^Sepal'</code>	Matches strings beginning with the word 'Sepal'
<code>'^x[1-5]\$'</code>	Matches strings beginning with 'x' and ending with 1,2,3,4,5
<code>'^(?!Species\$).*</code>	Matches strings except the string 'Species'

Summarize Data

`df['w'].value_counts()`

Count number of rows with each unique value of variable

`len(df)`

of rows in DataFrame.

`df.shape`

Tuple of # of rows, # of columns in DataFrame.

`df['w'].nunique()`

of distinct values in a column.

`df.describe()`

Basic descriptive and statistics for each column (or GroupBy).



pandas provides a large set of **summary functions** that operate on different kinds of pandas objects (DataFrame columns, Series, GroupBy, Expanding and Rolling (see below)) and produce single values for each of the groups. When applied to a DataFrame, the result is returned as a pandas Series for each column. Examples:

`sum()`

Sum values of each object.

`count()`

Count non-NA/null values of each object.

`median()`

Median value of each object.

`quantile([0.25,0.75])`

Quantiles of each object.

`apply(function)`

Apply function to each object.

`min()`

Minimum value in each object.

`max()`

Maximum value in each object.

`mean()`

Mean value of each object.


`var()`

Variance of each object.

`std()`

Standard deviation of each object.

Group Data

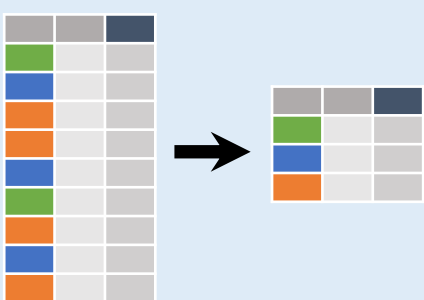

`df.groupby(by="col")`

Return a GroupBy object, grouped by values in column named "col".

`df.groupby(level="ind")`

Return a GroupBy object, grouped by values in index level named "ind".

All of the summary functions listed above can be applied to a group. Additional GroupBy functions:

`size()`

Size of each group.

`agg(function)`

Aggregate group using function.

Windows

`df.expanding()`

Return an Expanding object allowing summary functions to be applied cumulatively.

`df.rolling(n)`

Return a Rolling object allowing summary functions to be applied to windows of length n.

Handling Missing Data


`df.dropna()`

Drop rows with any column having NA/null data.

`df.fillna(value)`

Replace all NA/null data with value.

Make New Columns



`df.assign(Area=lambda df: df.Length*df.Height)`

Compute and append one or more new columns.

`df['Volume'] = df.Length*df.Height*df.Depth`

Add single column.

`pd.qcut(df.col, n, labels=False)`

Bin column into n buckets.



pandas provides a large set of **vector functions** that operate on all columns of a DataFrame or a single selected column (a pandas Series). These functions produce vectors of values for each of the columns, or a single Series for the individual Series. Examples:

`max(axis=1)`

Element-wise max.

`min(axis=1)`

Element-wise min.

`clip(lower=-10,upper=10)`

Trim values at input thresholds

`abs()`

Absolute value.

The examples below can also be applied to groups. In this case, the function is applied on a per-group basis, and the returned vectors are of the length of the original DataFrame.

`shift(1)`

Copy with values shifted by 1.

`shift(-1)`

Copy with values lagged by 1.

`rank(method='dense')`

Ranks with no gaps.

`cumsum()`

Cumulative sum.

`rank(method='min')`

Ranks. Ties get min rank.

`cummax()`

Cumulative max.

`rank(pct=True)`

Ranks rescaled to interval [0, 1].

`cummin()`

Cumulative min.

`rank(method='first')`

Ranks. Ties go to first value.


`cumprod()`

Cumulative product.

Plotting


`df.plot.hist()`

Histogram for each column



`df.plot.scatter(x='w',y='h')`

Scatter chart using pairs of points



Combine Data Sets

adf

x1	x2
A	1
B	2
C	3



bdf

x1	x3
A	T
B	F
D	T



Standard Joins

x1	x2	x3
A	1	T
B	2	F
C	3	NaN

`pd.merge(adf, bdf, how='left', on='x1')`
Join matching rows from bdf to adf.

x1	x2	x3
A	1.0	T
B	2.0	F
D	NaN	T

`pd.merge(adf, bdf, how='right', on='x1')`
Join matching rows from adf to bdf.

x1	x2	x3
A	1	T
B	2	F

`pd.merge(adf, bdf, how='inner', on='x1')`
Join data. Retain only rows in both sets.

x1	x2	x3
A	1	T
B	2	F
C	3	NaN
D	NaN	T

`pd.merge(adf, bdf, how='outer', on='x1')`
Join data. Retain all values, all rows.

Filtering Joins

x1	x2
A	1
B	2

`adf[adf.x1.isin(bdf.x1)]`
All rows in adf that have a match in bdf.

x1	x2
C	3

`adf[~adf.x1.isin(bdf.x1)]`
All rows in adf that do not have a match in bdf.

ydf

x1	x2
A	1
B	2
C	3



zdf

x1	x2
B	2
C	3
D	4



Set-like Operations

x1	x2
B	2
C	3

`pd.merge(ydf, zdf)`
Rows that appear in both ydf and zdf (Intersection).

x1	x2
A	1
B	2
C	3
D	4

`pd.merge(ydf, zdf, how='outer')`
Rows that appear in either or both ydf and zdf (Union).

x1	x2
A	1

`pd.merge(ydf, zdf, how='outer', indicator=True)`
`.query('_merge == "left_only"')`
`.drop(columns=['_merge'])`
Rows that appear in ydf but not zdf (Setdiff).